

LED SHINE

Vanish 1000 Series

High Brightness

The peak brightness reaches 5000nits, ensuring the video image can be viewed clearly even under direct sunlight.



High Transparency

Featured in 75% transparency, the Vanish 1000 series panel redefines the possibilities of the creative transparent displays.



Lightweight and Thin

Large panel with lightweight of around 10kg/ m² and very thin cabinet structure enables easy setup and transport.



LED SHINE TECH CO.,LTD.

Unit 1, No. 1040-2, Longgang Avenue, Pingdi sub-district, Longgang District, Shenzhen, China.

Tel: +86-755-28904979 E-mail: sales@ledshine.tech

For more information, please visit www.ledshine.tech

Easy Maintenance


Modular design allows Power and Data Units can be easily replaced.

Easy installation

It's quite easy and fast to set up a screen with the help of our unique locking system.

Flexible size

The vanish 1000 series is available for 1000*1000mm,1000*500mm,500*1000mm and 500*500mm to realize your project size accurately.

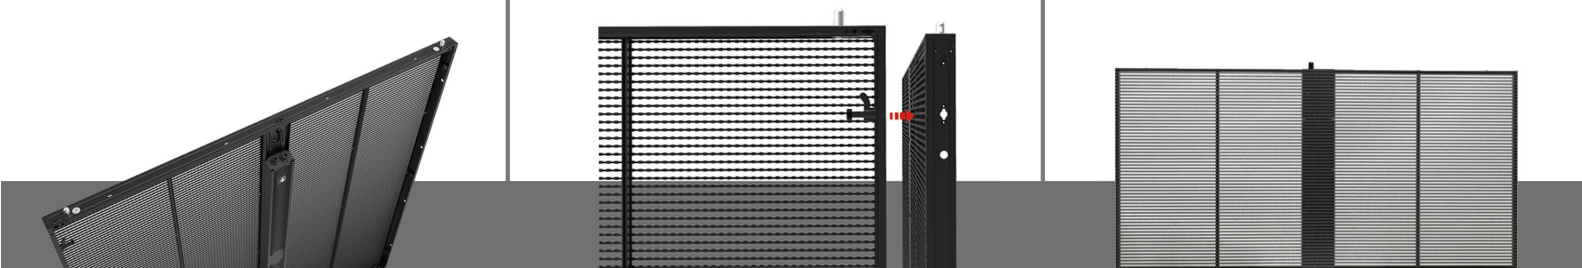

SPECIFICATIONS

Model	P3.125	P2.6-5.2	P2.8-5.6	P3.9-7.8	P7.8
Pixel pitch: H-V (mm)	3.125mm-3.125 mm	2.6-5.2 mm	2.8mm-5.6mm	3.9mm-7.8mm	7.8mm-7.8mm
Pixel Density (Pixels/㎡)	102400 dots/㎡	73728 dots/㎡	61952 dots/㎡	32768 dots/㎡	16384 dots/㎡
LED type	SMD1415	SMD1415	SMD1415	SMD1921	SMD1921
Refresh rate(Hz)	1920-3840Hz	1920-3840Hz	1920-3840Hz	1920-3840Hz	1920-3840Hz
Module size(mm)	500*62.5 mm	500*125mm	500*125mm	500*125mm	500*125mm
Module Resolution	160*20 dots	192*24 dots	176*22 dots	128*16 dots	64*16 dots
Cabinet Size(mm)	1000*1000*75mm (1000*500mm/500*1000mm available)				
Cabinet Resolution	320*320 dots	384*192 dots	352*176 dots	256*128 dots	128*128 dots
Transparency Rate	55%	65%	70%	75%	75%
Brightness(cd/m)	4500-5000cd/㎡	4500-5000cd/㎡	5000cd/㎡	5000cd/㎡	5000cd/㎡
Viewing Angle(H/V)	170/170	170/170	170/170	170/170	170/170
Cabinet Material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Cabinet weight(kg)	10KG	10KG	10KG	10KG	10KG
Input voltage(V)	AC100-240V	AC100-240V	AC100-240V	AC100-240V	AC100-240V
Max Power c.(W/㎡)	600W/㎡	600W/㎡	600W/㎡	600W/㎡	600W/㎡
Average Power c.(W/㎡)	200W/㎡	200W/㎡	200W/㎡	200W/㎡	200W/㎡
Life span(H)	≥50,000H	≥50,000H	≥50,000H	≥50,000H	≥50,000H
IP Rate	IP30	IP30	IP30	IP30	IP30