

Wing-Flex Series



Easy Maintenance



High Brightness



HDR Support



Tunnel/Archway/Vave/Cylinder



Modular Design



Edge Protection


FEATURES

Ultra light weight of 6.5kg/panel for easy handling and installation;

The flexible panel supports 45° convex and 30° concave, just 8 panels can make a cylinder;

The Wing-Flex panels and Wing panels are fully compatible.

Curve with easy and precision.

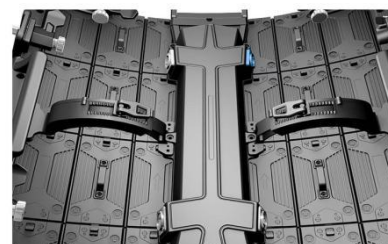

LED SHINE TECH CO.,LTD.

Unit 1, No. 1040-2, Longgang Avenue, Pingdi sub-district, Longgang District, Shenzhen, China.


Tel: +86-755-28904979 E-mail: sales@ledshine.tech

For more information, please visit www.ledshine.tech

SPECIFICATIONS

Pixel Pitch	1.9mm	2.6mm	2.9mm	3.9mm
LED Type	SMD1212	SMD1515	SMD1515	SMD2121
Pixel Density	262,144	147,456	112,896	65,536
Module Size	500*125mm			
Module Resolution	256*64	192*48	168*42	128*32
Cabinet Size	500*500*105mm			
Cabinet Resolution	256*256	192*192	168*168	128*128
Scan Mode	1/32S	1/24S	1/21S	1/16S
Brightness	1,000nits	1,200nits	1,200nits	1,200nits
Refresh Rate	7680Hz	7680Hz	7680Hz	7680Hz
Viewing Angle (H/V)	160°/160°	160°/160°	160°/160°	160°/160°
Cabinet Material	Die-casting Aluminum			
Cabinet Weight	6.5kg			
Curve Degree	Concave 30° ~ Convex 45°			
Input Voltage	AC100-240V			
Max Power c.	512W			
Average Power c.	272W			
Working Temperature	-20°C ~ +45°C			
Life Span	≥100,000H			
IP Rate	IP30			

Factory aging test

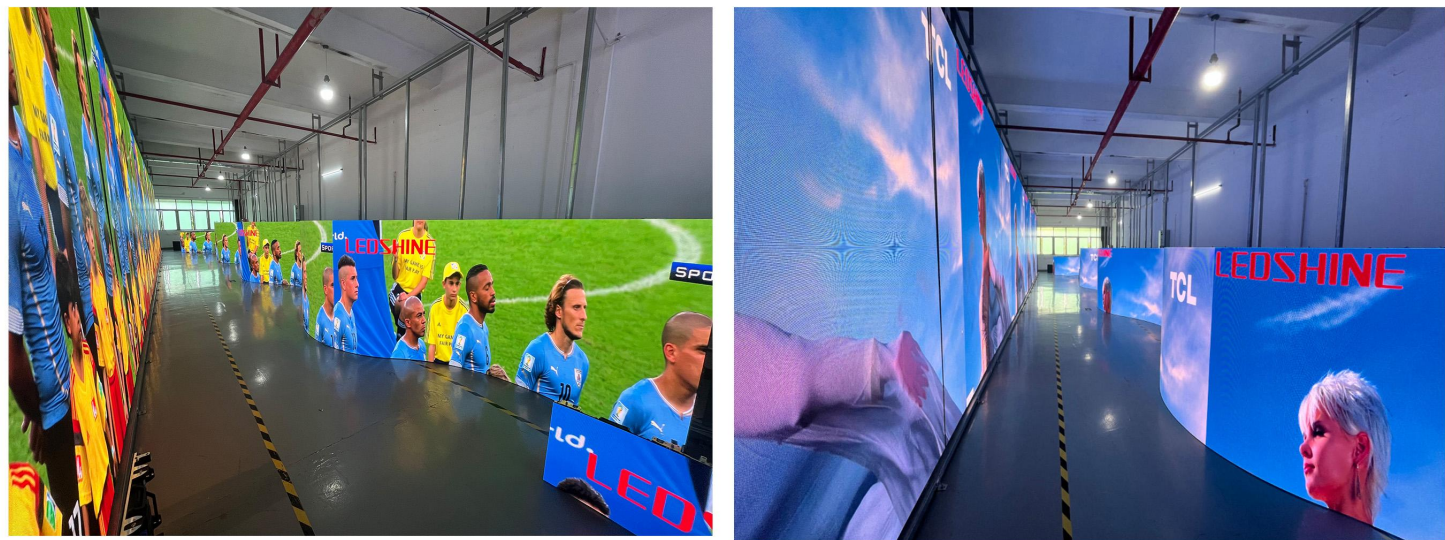

LED SHINE

www.ledshine.tech