

SP Series

High-end stadium screen



High brightness



Remote control



Before/after maintenance



High refresh rate




Ultra wide field of view



Super protection

Black soft mask ,high contrast
Top soft protective pad design process
Good toughness and impact resistance

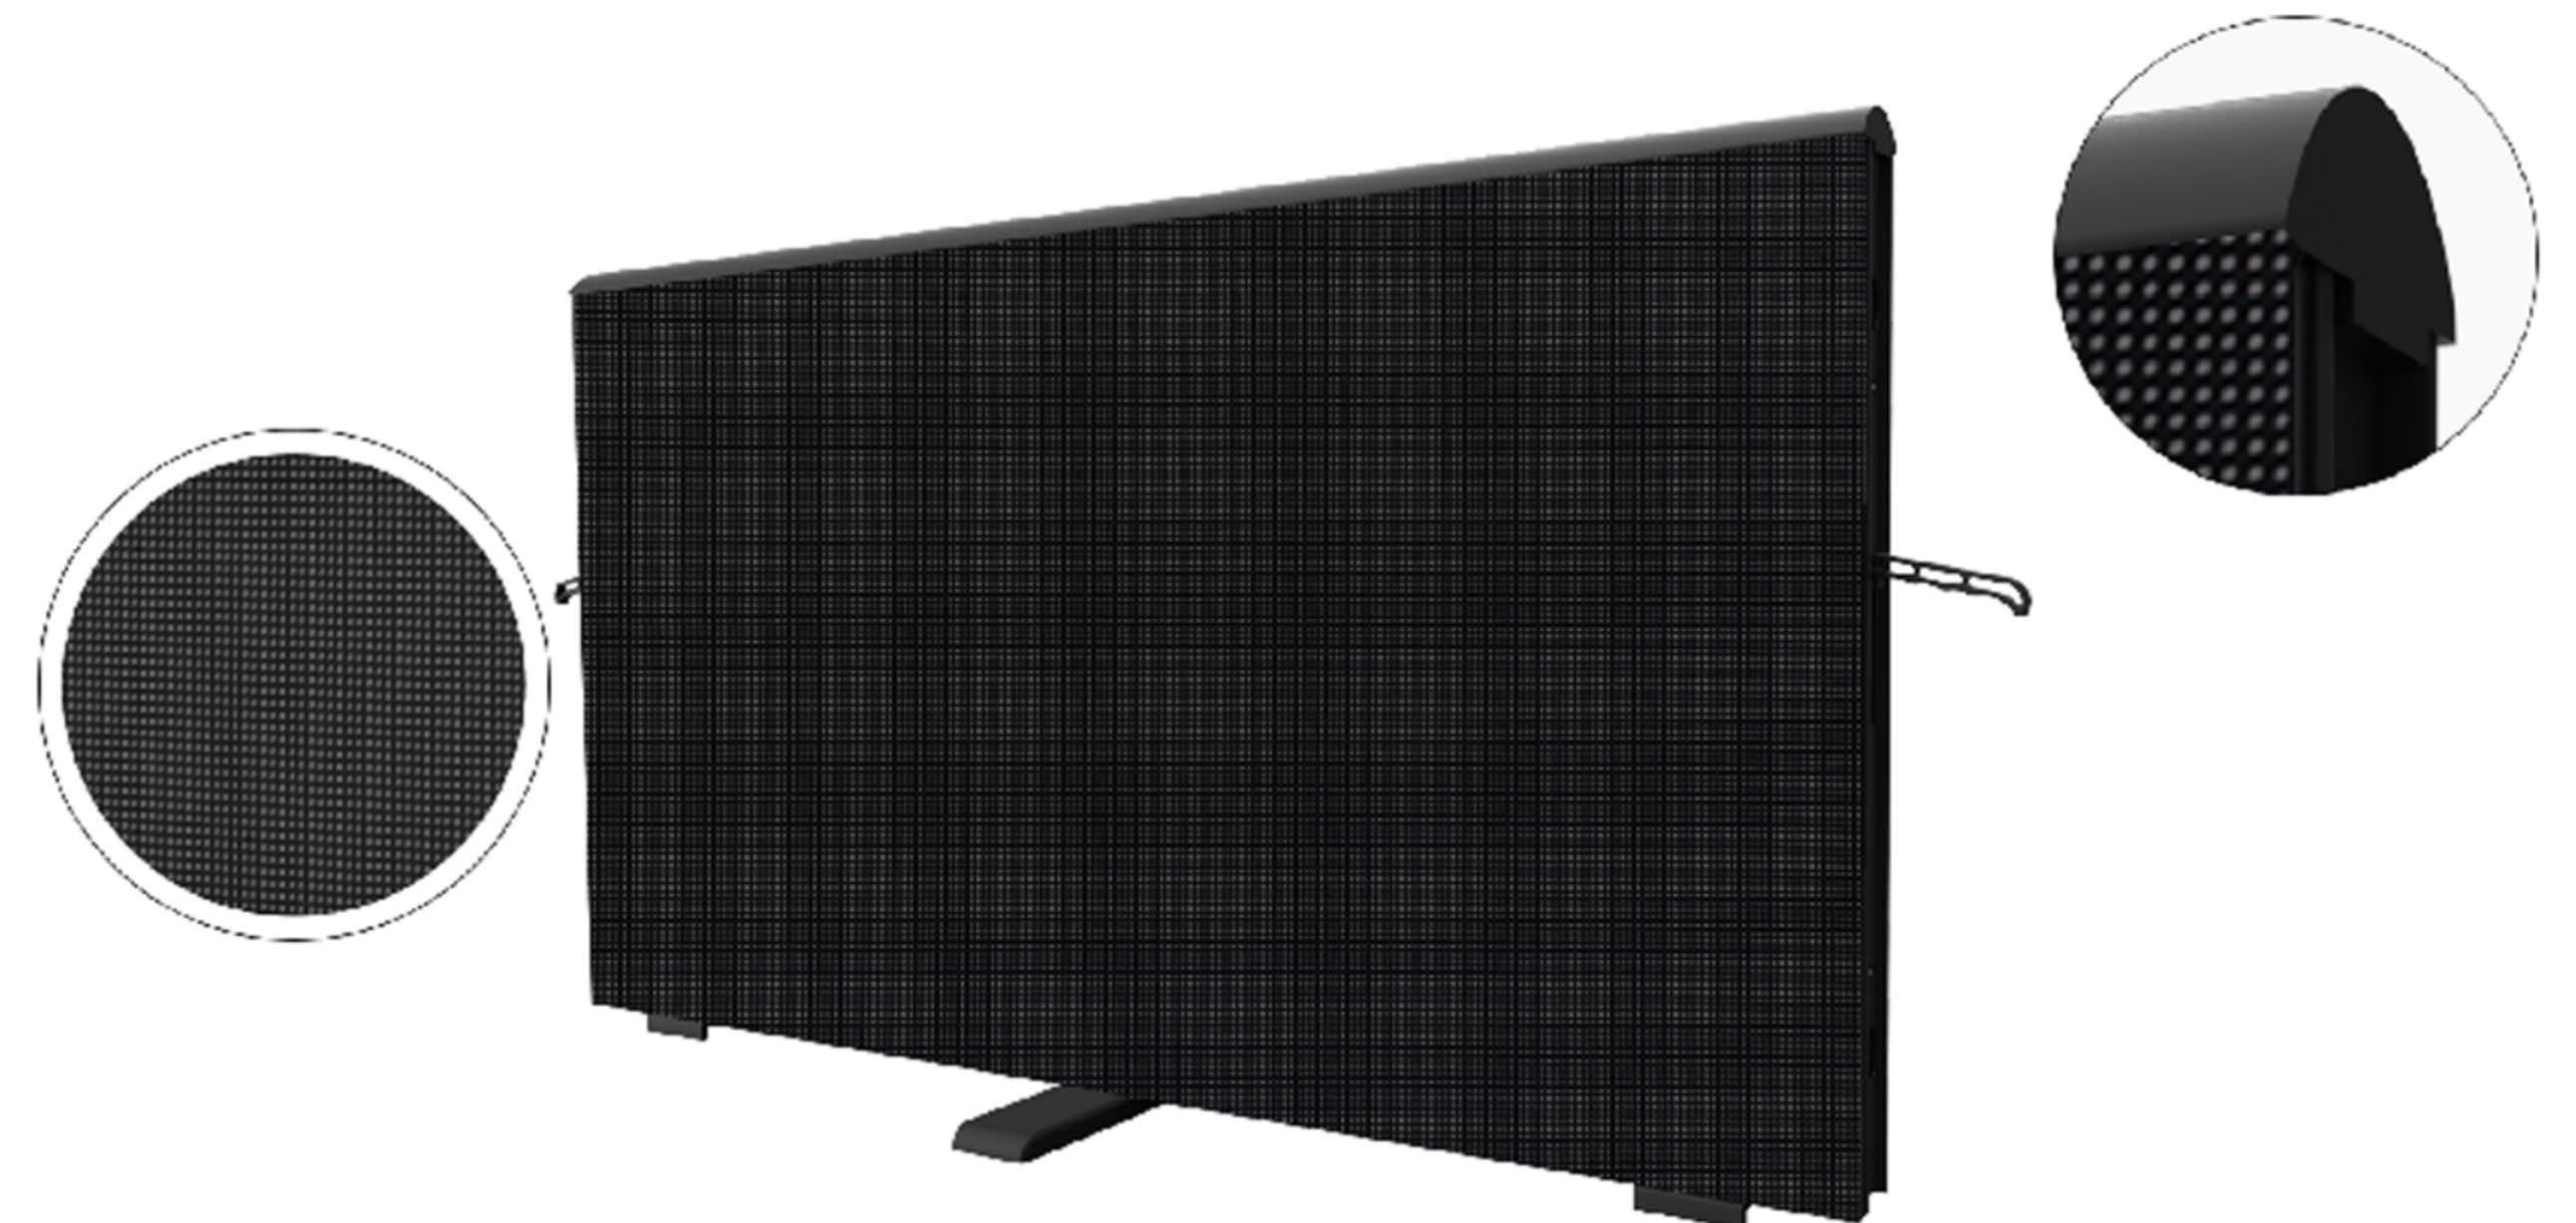

Adjustable angle: 90°, 85°, 80°, 75°, 70°, 65°
Adapt to the shooting of the main camera to
meet the needs of the live audience.



LED SHINE TECH CO.,LTD.

Unit 1, No. 1040-2, Longgang Avenue, Pingdi sub-district, Longgang District, Shenzhen, China.

Tel: +86-755-28904979 E-mail: sales@ledshine.tech

For more information, please visit www.ledshine.tech

SPECIFICATIONS

Pixel pitch	6.25mm	8.33mm	10mm
SMD Type	SMD2727	SMD2727	SMD2727
Physical Density	25600dots/sqm	14400dots/sqm	10000dots/sqm
Module Dimension	400X300mm	400X300mm	400X300mm
Module Resolution	64X48	48X36	40X30
Panel Size	1600X900X98mm	1600X900X98mm	1600X900X98mm
Panel Resolution	256X144	192X108	160X90
Maintenance Mode	Front & Rear	Front & Rear	Front & Rear
Brightness	6500nits	6500nits	6500nits
Color Temperature	3200-9000K optional	3200-9000K optional	3200-9000K optional
Cabinet Weight	35kg	35kg	35kg
Viewing Angle (V/H)	160°/ 140°	160°/ 140°	160°/ 140°
Contrast Ratio	5000:1	5000:1	5000:1
Frame-changing Frequently	50/60Hz	50/60Hz	50/60Hz
Drive Mode	1/6S	1/3S	1/2S
Refresh Rate	3840Hz	3840Hz	3840Hz
Max Power Consumption	700-800W/m²	700-800W/m²	700-800W/m²
Avg. Power Consumption	200-300W/m²	200-300W/m²	200-300W/m²

DIMENSIONS

