

LED Can Display



Support HD



Smart split screen



Multiple interfaces



Wireless support




Synchronous/asynchronous control



Seamless stitching

● Multiple playback methods

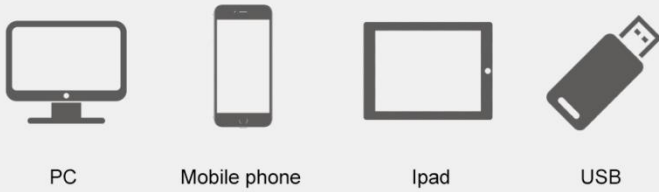

● Multiple interfaces



● Intelligent cluster management

Support remote intelligent monitoring, remote and timed screen on and off


Support remote wireless interactive operation with mobile phones and smart terminals, ultimate control anytime, anywhere




● Factory aging test



P2 DIMENSIONS

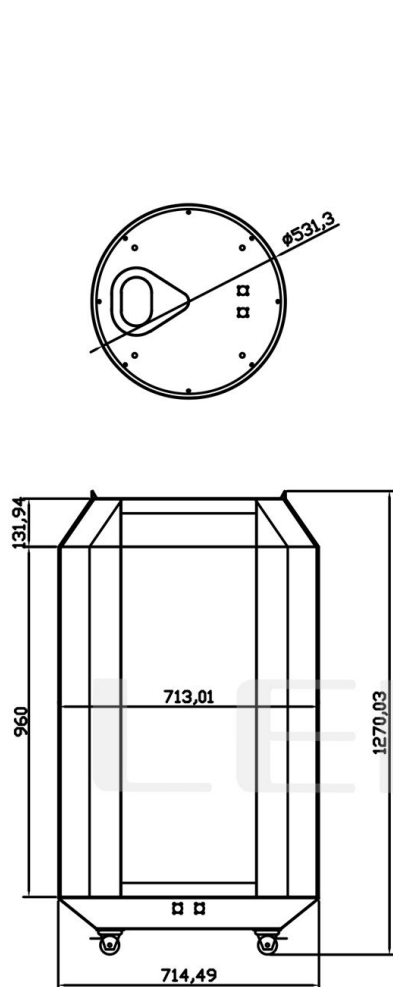

Diameter: 713mm
Height: 1270mm

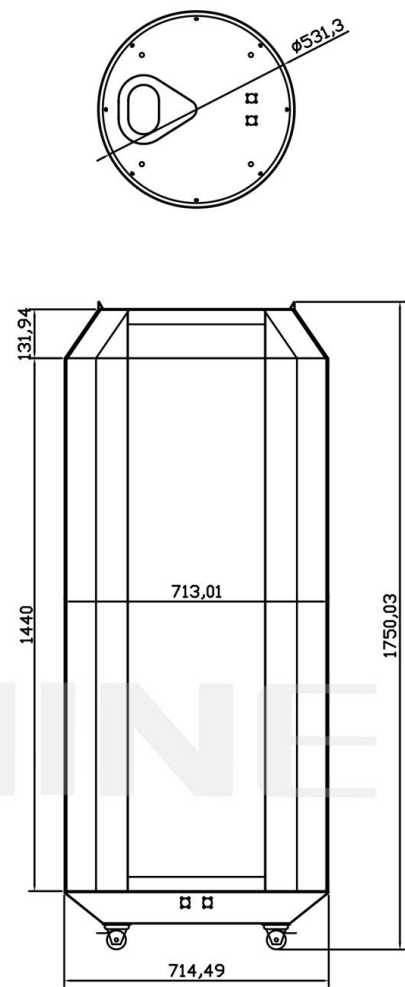

Diameter: 713mm
Height: 1750mm

SPECIFICATIONS

SPECIFICATIONS	Indoor			Outdoor
Model	P2	P2	P1.8	P4
Lamp type	SMD1515 (GOB optional)	SMD1515 (GOB optional)	SMD1212 (GOB optional)	SMD1921
Pixel density	250000 dots/㎡	250000 dots/㎡	288906 dots/㎡	62500 dots/㎡
Diameter	713mm	713mm	611mm	764mm
Height	1270mm	1750mm	1700mm	1556mm
Display pixels	1120X560 dots	1120X800 dots	1032X817 dots	600X360 dots
Control mode	Network cable/WIFI/4G cloud control (optional)			
Maintenance mode	Front maintenance			
Brightness	≥600 nits	≥600 nits	≥600 nits	4500 nits
Viewing angle (H/V)	170°/170°	170°/170°	170°/170°	170°/170°
Contrast	6000 : 1	6000 : 1	6000 : 1	6000 : 1
Drive mode	1/40 scan	1/40 scan	1/40 scan	1/10 scan
Grayscale level	14-16 bit	14-16 bit	14-16 bit	14-16 bit
Refresh rate	3840 Hz	3840 Hz	3840 Hz	3840 Hz
Maximum power consumption	1200 W/set	1700 W/set	1500 W/set	2000 W/set
Average power consumption	400 W/set	560 W/set	500 W/set	600 W/set
Power input voltage	AC90-264V,47-63Hz			
Working temperature/humidity range	-20~50°C/10%~85%			
Storage temperature/humidity range	-20~50°C/10%~85%			
Net weight	65kg	91kg	68kg	120kg
Gross weight(wooden case)	133kg	160kg	142kg	205kg
Packing size(wooden case)	900*900*1490mm	900*900*1950mm	900*900*1920mm	900*900*1750mm
Gross weight(flight case)	130kg	170kg	145kg	210kg
Packing size(flight case)	890*890*1530mm	890*890*2020mm	950*950*1900mm	890*890*1750mm