




Uslim Series

Ultra-Slim Indoor Commercial Solution

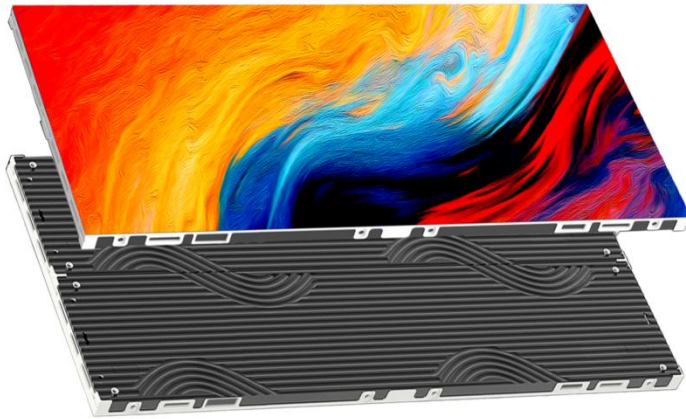

Light weight



Front access



Seamless



Wide viewing angle



High refresh rate



High grey scale



Quick installation

FEATURES

- High precision die-casting aluminum cabinet, seamless splicing, super flatness, ultra viewing angle.
- Light weight, flexible combination of various panels: 10.5kg/5.6kg/4.0kg/3.0kg (21-24kg/sqm)
- High contrast ratio by anti-glare matte black LEDs.
- Full front access for easy assembly and maintenance.
- Hub card connection without power cables and pin cables ensuring more stable operation.
- Support stacking installation, hanging installation, wall mounting, ceiling installation, etc.

APPLICATIONS



SPECIFICATIONS

Model	Uslim 1.2 GOB	Uslim 1.5 GOB	Uslim 1.9	Uslim 2.5	Uslim 2.6	Uslim 3.9
Pixel Pitch	1.25mm	1.5625mm	1.95mm	2.5mm	2.6mm	3.9mm
Pixel Density (dots/m²)	640,000	409,600	262,144	160,000	147,456	65,536
LEDs Model	SMD1010	SMD1212	SMD1515	SMD1515	SMD1515	SMD2020
Module Dimension	250*250mm					
Module Resolution	200*200dots	160*160dots	128*128dots	100*100dots	96*96dots	64*64dots
Panel Dimension	1000x500x33mm (1000x250x33mm 750x250x33mm 500x250x33mm)					
Panel Resolution	800*400dots	640*320dots	512*256dots	400*200dots	384*192dots	256*128dots
Cabinet Material	Die-casting Aluminum					
Panel Weight	21kg/m²					
Brightness	800nits (indoor), 3000nits (semi-outdoor)					
Max Power Consumption	480W/m²					
Ave Power Consumption	100-200W/m²					
Power Input Voltage	100-240V/AC50-60Hz					
Viewing Angle	170°/170°					
Operating Temperature	-20~+45°C					
Refresh Rate	7680Hz					
Installation Type	Front installation					
Service Type	Front service					
IP Rating	IP30					
Signal Input Source	S-VIDIO,VGA,DVI,HDMI,SDI					
Certification	CE,RoHS,FCC					

DIMENSIONS

