


Vanish Series

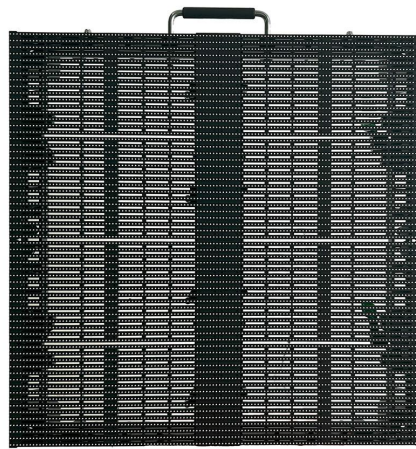

500*500mm

1000*500mm

FEATURES

The Vanish series panel offers an outdoor touring solution in a transparent panel design. It is featured with a high brightness up to 4500nits, over 53% high transparency rate, light weight but strong cabinet structure. It supports 90° installation, convex 10° and concave 15°.

- Vanish series offers a wide range of installation options, including both hanging and stacking installation, affording customers the adaptability to customize their staging to the unique demands of any event space.



53%-71% High Transparency



4500nits High Brightness






9kg Light Weight



Curvable



90 Degree available

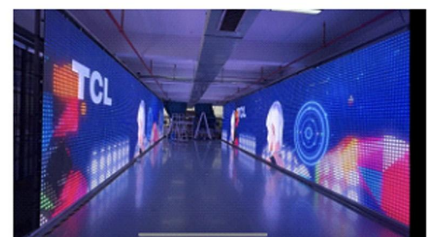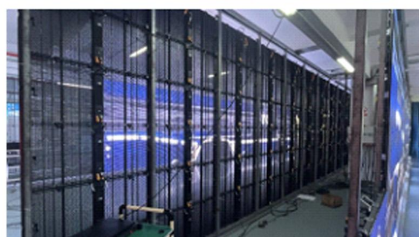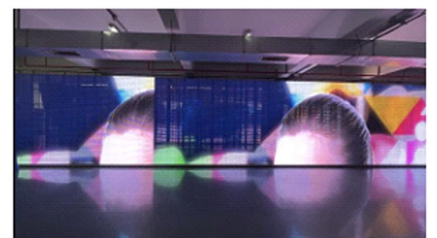

SPECIFICATIONS

Model	Vanish 3.9-7.8
Pixel Pitch	3.9mm-7.8mm
Pixel Density	32,768 dots/sqm
LED Type	SMD1921 (Black LEDs optional)
Scan Mode	1/8 scan
Refresh Rate	7680 Hz
Module Size	500*125 mm
Module Resolution	128*16 dots
Cabinet Size	1000*500mm / 500*500mm
Cabinet Resolution	256*64 dots / 128*64 dots
Transparency Rate	53%
Brightness	4500 nits
Viewing Angle	160°/160°
Cabinet Material	Die-casting Aluminum
Cabinet Weight	9kg / 5.7kg
Curve	Concave 15°~Convex 10°, 45°(optional)
Input Voltage	AC100-240V
Max Power c.	600W/sqm
Average Power c.	200W/sqm
Life Span	≥100,000H
IP Rate	IP65
Max Stacking	20 panels
Max Rigging	18 panels
Certification	CE,RoHS,FCC

*Note: The Specifications are for reference, actual values may vary.

1. The max. hanging amount is only valid when the Ledshine hanging bar and complementary accessories are used and in an outdoor situation, safety factor is 8. No climbing is allowed.
2. The max. stacking amount is only valid when the Ledshine stacking system and complementary accessories are used,sufficient ballast is applied and in an outdoor situation. No climbing is allowed.