

LED SHINE

Ostorm Series

Ultra Durable DOOH Solution






P2.9, P3.9, P4.8, P5.9, P6, P8, P10 SMD

FEATURES

- 20% less in weight and 1/6 less in thickness compared with traditional cabinet. Cost-effective in transportation and labors;
- Fanless power supply box integrate power supply, receiver card and hub card, with water-proof ring to ensure stable performance and long life;
- Ultra stable and high efficient Megmeet power supply to ensure the stability of outdoor application;
- High scan mode design to ensure the best brightness and performance;
- Support various cabinet sizes to meet different project size.

APPLICATIONS

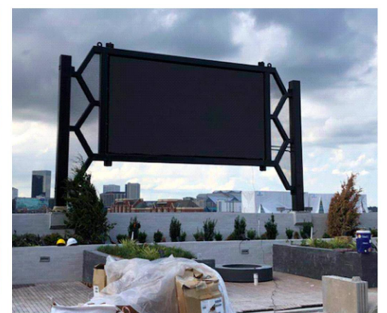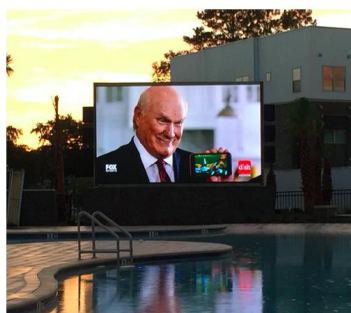

SPECIFICATIONS

Parameter	P2.9	P3.9	P4.8	P5.9	P6	P8	P10
Pixel Pitch	2.9mm	3.9mm	4.8mm	5.9mm	6mm	8mm	10mm
LED Model	SMD1415	SMD1921	SMD1921	SMD1921	SMD2727	SMD2727	SMD2727
Module size	250x250mm				240x240mm		
Module Resolution	84×84	64×64	52×52	42×42	40×40	30×30	24×24
Cabinet Size	500x1000x102mm	1000x1000x122mm			960x960x122mm		
Cabinet Resolution	168×336	256×256	208×208	168×168	160×160	120x120	96x96
Cabinet Weight	16kg	40kg			35kg		
Brightness	5500~6000nits				≥6000/8000nits		≥6000nits
Scanning Mode	1/14 scan	1/8 scan	1/7 scan	1/6 scan	1/5 scan	1/3 scan	1/2 scan
Refresh Rate	≥3840Hz						
Gray Scale	14bit						
Power Consumptio(Max./Avg.)	950W/m² / 320W/m²						
Cabinet Material	Aluminum						
IP Rating	IP65						
Operating Temperature	-20°C~+50°C						

DIMENSIONS

