



# Flexible module



320\*160mm and 240\*120mm

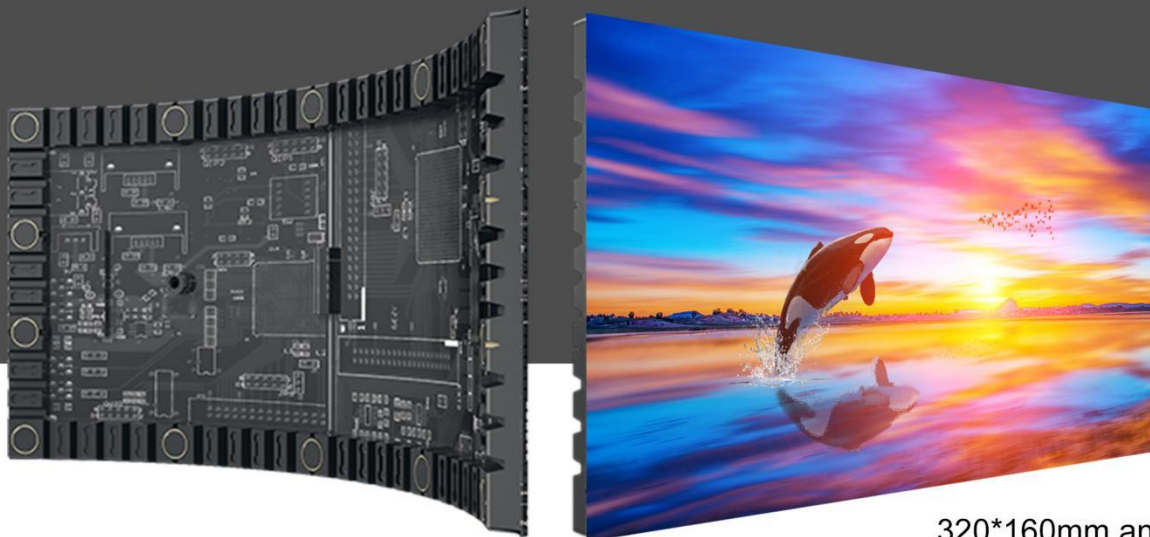

High flexibility

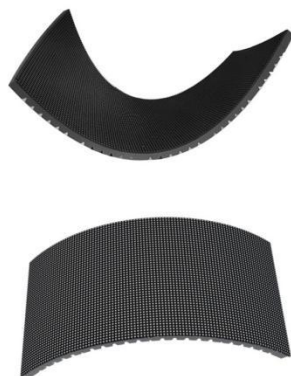

Bending inwards and outwards



Slim and Light

## Application



# SPECIFICATIONS

Module size:320×160mm

| SPECIFICATIONS      | Indoor          |              |              |              |              |              |             |
|---------------------|-----------------|--------------|--------------|--------------|--------------|--------------|-------------|
| Model               | P1.25           | P1.5         | P1.8         | P2           | P2.5         | P3           | P4          |
| Pixel pitch         | 1.25mm          | 1.538mm      | 1.86mm       | 2mm          | 2.5mm        | 3.076mm      | 4mm         |
| Pixel Density(/sqm) | 640,000 dots    | 422,500 dots | 288,906 dots | 250,000 dots | 160,000 dots | 105,625 dots | 62,500 dots |
| Module size         | 320×160mm       |              |              |              |              |              |             |
| Resolution          | 256×128         | 208×104      | 172×86       | 160×80       | 128×64       | 104×52       | 80×40       |
| Lamp size           | TOP1010         | SMD1212      | SMD1515      | SMD1515      | SMD1515      | SMD1515      | SMD2020     |
| Brightness          | 600nits~800nits |              |              |              |              |              |             |
| Refresh rate        | 3840Hz~7680Hz   |              |              |              |              |              |             |
| Scan mode           | 1/64 scan       | 1/52 scan    | 1/43 scan    | 1/40 scan    | 1/32 scan    | 1/26 scan    | 1/20 scan   |
| Input voltage       | 5V              | 5V           | 5V           | 5V           | 5V           | 5V           | 5V          |
| Max current         | 5A              | 4.5A         | 4.4A         | 4.6A         | 4.2A         | 4.2A         | 3.6A        |
| Max consumption     | 30W             | 22.5W        | 22W          | 23W          | 21W          | 21W          | 18W         |
| Weight              | 330g            | 340g         | 340g         | 340g         | 290g         | 290g         | 280g        |
| Thickness           | 8.6mm           | 8.6mm        | 8.6mm        | 8.6mm        | 8.6mm        | 8.6mm        | 8.6mm       |

Module size:240×120mm

| SPECIFICATIONS      | Indoor          |              |              |              |              |              |              |              |             |
|---------------------|-----------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|-------------|
| Model               | P0.9            | P1.25        | P1.5         | P1.6         | P1.8         | P2           | P2.5         | P3           | P4          |
| Pixel pitch         | 0.9375          | 1.25         | 1.579        | 1.667        | 1.875        | 2            | 2.5          | 3            | 4           |
| Pixel Density(/sqm) | 1,137,777 dots  | 640,000 dots | 401,111 dots | 360,000 dots | 284,444 dots | 250,000 dots | 160,000 dots | 111,111 dots | 62,500 dots |
| Module size         | 240×120mm       |              |              |              |              |              |              |              |             |
| Resolution          | 256×128         | 192×96       | 152×76       | 144×72       | 128×64       | 120×60       | 96×48        | 80×40        | 60×30       |
| Lamp size           | SMD4in1         | SMD1010      | SMD1212      | SMD1212      | SMD1515      | SMD1515      | SMD1515      | SMD2121      | SMD2121     |
| Brightness          | 600nits~800nits |              |              |              |              |              |              |              |             |
| Refresh rate        | 3840Hz~7680Hz   |              |              |              |              |              |              |              |             |
| Scan mode           | 1/64 scan       | 1/48 scan    | 1/38 scan    | 1/36 scan    | 1/32 scan    | 1/30 scan    | 1/24 scan    | 1/20 scan    | 1/15 scan   |
| Input voltage       | R:2.8 GB:3.8    | 5V           | 5V           | 5V           | 5V           | 5V           | 5V           | 5V           | 5V          |
| Max current         | 3.8A            | 3.2A         | 2.8A         | 2.8A         | 2.8A         | 2.8A         | 2.6A         | 2.5A         | 2.6A        |
| Max consumption     | 14W             | 16W          | 14W          | 14W          | 14W          | 14W          | 13W          | 12.5W        | 13W         |
| Weight              | 220g            | 220g         | 210g         | 200g         | 217g         | 210g         | 190g         | 175g         | 175g        |
| Thickness           | 8.4mm           | 8.6mm        | 8.6mm        | 8.6mm        | 8.6mm        | 8.6mm        | 8.6mm        | 8.6mm        | 8.6mm       |