

LED SHINE



MX Series

- ◆ Strong Aluminum Cabinet
- ◆ Light Weight
- ◆ Front & Rear Maintenance
- ◆ High Brightness
- ◆ High Reliability
- ◆ Support Wall-Mounting
- ◆ High reliable Megmeet power supply

FEATURES

1000*1000*83mm

22.5kg

- With ultra slim and light weight design, MX series is easy to install by individual.
- Front and rear maintenance, making it easier to operate in different applications.
- MX series has a delicate structure and seamless splicing, which can achieve super flatness.
- Hard connection supports full front access.

APPLICATIONS



LED SHINE TECH CO.,LTD.

Unit 1, No. 1040-2, Longgang Avenue, Pingdi sub-district, Longgang District, Shenzhen, China.


Tel: +86-755-28904979 E-mail: sales@ledshine.tech

For more information, please visit www.ledshine.tech

SPECIFICATIONS

Module Number	P2.9	P3.9	P4.8	P6.25	P7.8	P10.4
Pixel Pitch	2.9mm	3.9mm	4.8mm	6.25mm	7.8mm	10.4mm
Physical Density(pixels/m²)	112,896	65,536	43,264	25,600	16,384	9,216
LED Model	SMD1415	SMD1921	SMD1921	SMD2727	SMD2727	SMD3535
Module Dimensions	500x250mm					
Module Resolution	168x84	128x64	104x52	80x40	64x32	48x24
Cabinet Dimensions	1000x1000x83mm (Optional for 1000x500x83mm,1500x1000x83mm,1500x500x83mm)					
Cabinet Resolution	336x336	256x256	208x208	160x160	128x128	96x96
Cabinet Weight	22.5kg / 12KG / 34.5 KG / 18.5KG					
Brightness	5500~6000nits (Optional for 8000~8500nits)					
Drive Mode	1/21 scan	1/16 scan 1/8 scan optional	1/13 scan 1/7 scan optional	1/8 scan	1/4 scan	1/2 scan
Max Power Consumption	600w/m²					
Ave Power Consumption	200w/m²					
Viewing Angle	160°(W)140°(H)					
Operating Powersource	100-240V,50-60Hz					
Operating Temperature	-20°C~+50°C					
Refresh Rate	3,840Hz					
IP Rating	IP65					
Certificate	CE,RoHS,FCC					

DIMENSIONS

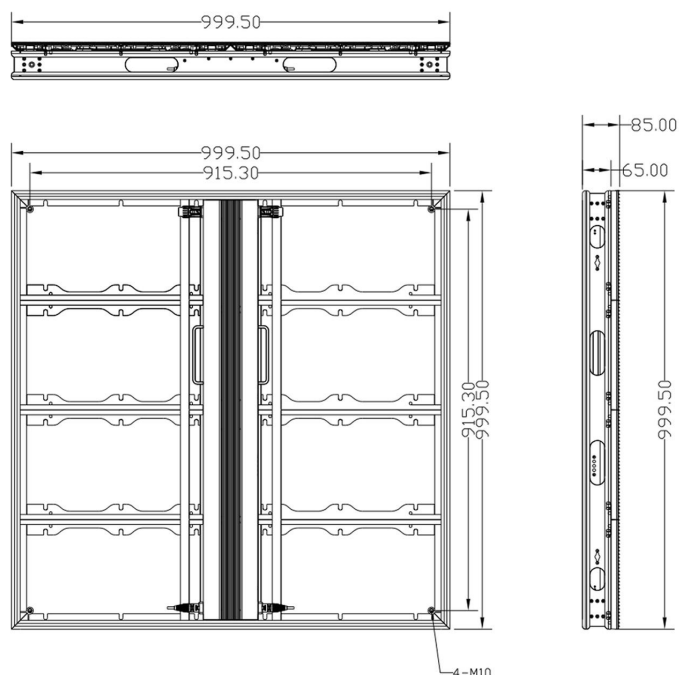

LED SHINE

www.ledshine.tech